

2–16 GHz Low Noise Gallium Arsenide FET

Technical Data

ATF-13736

Features


- **Low Noise Figure:**
1.8 dB Typical at 12 GHz
- **High Associated Gain:**
9.0 dB Typical at 12 GHz
- **High Output Power:**
17.5 dB Typical at 12 GHz
- **Cost Effective Ceramic Microstrip Package**
- **Tape-and-Reel Packaging Option Available^[1]**

Description

The ATF-13736 is a high performance gallium arsenide Schottky-barrier-gate field effect transistor housed in a cost effective microstrip package. Its noise figure makes this device appropriate for use in the gain stages of low noise amplifiers operating in the 2-16 GHz frequency range.

This GaAs FET device has a nominal 0.3 micron gate length with a total gate periphery of

36 micro-X Package



250 microns. Proven gold based metallization systems and nitride passivation assure a rugged, reliable device.

Electrical Specifications, $T_A = 25^\circ\text{C}$

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.
NF _O	Optimum Noise Figure: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 20\text{ mA}$	$f = 8.0\text{ GHz}$	dB	1.5	2.2
		$f = 12.0\text{ GHz}$	dB	1.8	
		$f = 14.0\text{ GHz}$	dB	2.1	
G _A	Gain @ NF _O : $V_{DS} = 2.5\text{ V}$, $I_{DS} = 20\text{ mA}$	$f = 8.0\text{ GHz}$	dB	8.0	11.5
		$f = 12.0\text{ GHz}$	dB		9.0
		$f = 14.0\text{ GHz}$	dB		7.0
P _{1dB}	Power Output @ 1 dB Gain Compression: $V_{DS} = 4\text{ V}$, $I_{DS} = 40\text{ mA}$	$f = 12.0\text{ GHz}$	dBm	17.5	
G _{1dB}	1 dB Compressed Gain: $V_{DS} = 4\text{ V}$, $I_{DS} = 40\text{ mA}$	$f = 12.0\text{ GHz}$	dB	8.5	
g _m	Transconductance: $V_{DS} = 2.5\text{ V}$, $V_{GS} = 0\text{ V}$	mmho	25	55	
I _{DSS}	Saturated Drain Current: $V_{DS} = 2.5\text{ V}$, $V_{GS} = 0\text{ V}$	mA	40	50	90
V _P	Pinch-off Voltage: $V_{DS} = 2.5\text{ V}$, $I_{DS} = 1\text{ mA}$	V	-4.0	-1.5	-0.5

Note:

1. Refer to PACKAGING section "Tape-and-Reel Packaging for Surface Mount Semiconductors".

ATF-13736 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum ^[1]
V _{DS}	Drain-Source Voltage	V	+5
V _{GS}	Gate-Source Voltage	V	-4
V _{GD}	Gate-Drain Voltage	V	-6
I _{DS}	Drain Current	mA	I _{DSS}
P _T	Power Dissipation ^[2,3]	mW	225
T _{CH}	Channel Temperature	°C	175
T _{STG}	Storage Temperature ^[4]	°C	-65 to +175

Thermal Resistance: $\theta_{jc} = 400^\circ\text{C}/\text{W}; T_{CH} = 150^\circ\text{C}$
Liquid Crystal Measurement: 1 μm Spot Size^[5]

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T_{CASE} TEMPERATURE = 25°C.
3. Derate at 2.5 mW/°C for T_{CASE} > 85°C.
4. Storage above +150°C may tarnish the leads of this package making it difficult to solder into a circuit. After a device has been soldered into a circuit, it may be safely stored up to 175°C.
5. The small spot size of this technique results in a higher, though more accurate determination of θ_{jc} than do alternate methods. See MEASUREMENTS section for more information.

Part Number Ordering Information

Part Number	Devices Per Reel	Reel Size
ATF-13736-TR1	1000	7"
ATF-13736-STR	10	strip

ATF-13736 Noise Parameters: V_{DS} = 2.5 V, I_{DS} = 20 mA

Freq. GHz	NF _O dB	Γ_{opt}		R _N /50
		Mag	Ang	
4.0	1.1	.71	102	.10
6.0	1.3	.55	147	.07
8.0	1.5	.46	-144	.19
12.0	1.8	.50	-40	.88
14.0	2.1	.52	-2	1.17

ATF-13736 Typical Performance, T_A = 25°C

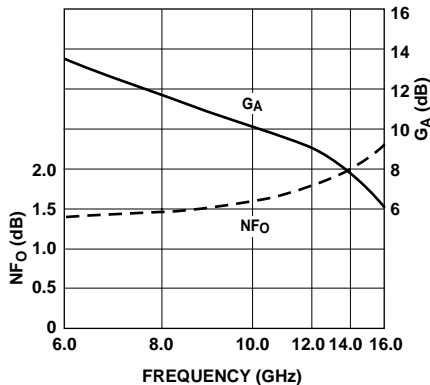


Figure 1. Optimum Noise Figure and Associated Gain vs. Frequency.
V_{DS} = 2.5V, I_{DS} = 20 mA, T_A = 25°C.

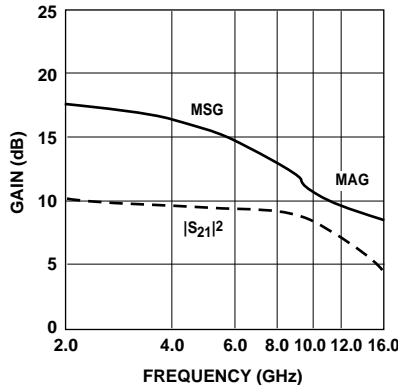


Figure 2. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency.
V_{DS} = 2.5 V, I_{DS} = 20 mA.

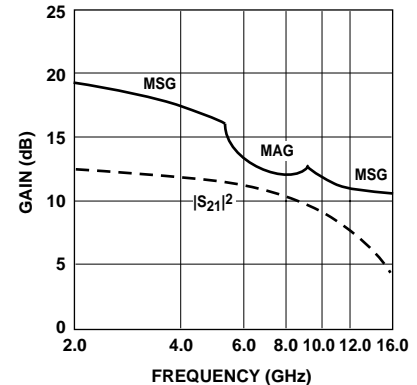


Figure 3. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency.
V_{DS} = 2.5 V, I_{DS} = 20 mA.

Typical Scattering Parameters, Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{DS} = 2.5\text{V}$, $I_{DS} = 20\text{mA}$



Freq. GHz	S_{11}		dB	S_{21}		dB	S_{12}		S_{22}	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
2.0	.94	-46	11.0	3.56	128	-26.4	.048	55	.59	-36
3.0	.86	-70	10.2	3.23	109	-25.2	.055	40	.57	-47
4.0	.84	-90	9.8	3.08	91	-23.1	.070	31	.56	-55
5.0	.77	-110	9.6	3.02	69	-20.9	.090	18	.52	-63
6.0	.68	-135	9.9	3.14	51	-19.3	.109	7	.47	-75
7.0	.59	-170	9.9	3.13	24	-18.0	.126	-12	.39	-92
8.0	.54	149	9.5	2.99	-1	-17.6	.132	-27	.30	-112
9.0	.56	112	8.8	2.75	-22	-16.9	.143	-43	.19	-121
10.0	.58	86	8.1	2.53	-43	-16.4	.152	-58	.11	-140
11.0	.60	63	7.6	2.41	-66	-16.5	.149	-73	.09	92
12.0	.64	39	7.0	2.24	-90	-17.1	.140	-81	.15	47
13.0	.68	20	6.4	2.08	-106	-17.6	.132	-90	.19	21
14.0	.70	9	6.0	1.99	-130	-18.0	.126	-97	.19	-3
15.0	.72	-1	5.2	1.83	-145	-18.2	.123	-111	.15	-26
16.0	.74	-17	4.6	1.70	-177	-18.4	.120	-129	.11	-34

Typical Scattering Parameters, Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{DS} = 4\text{V}$, $I_{DS} = 40\text{mA}$

Freq. GHz	S_{11}		dB	S_{21}		dB	S_{12}		S_{22}	
	Mag.	Ang.		Mag.	Ang.		Mag.	Ang.	Mag.	Ang.
2.0	.88	-44	13.5	4.73	130	-26.4	.048	64	.67	-28
3.0	.76	-68	13.0	4.47	107	-24.9	.057	52	.61	-39
4.0	.68	-90	12.4	4.19	86	-22.5	.075	39	.57	-46
5.0	.56	-113	12.0	4.00	66	-21.0	.089	32	.52	-52
6.0	.42	-145	11.8	3.90	44	-19.8	.102	21	.44	-61
7.0	.37	161	11.5	3.74	20	-18.6	.117	9	.31	-75
8.0	.47	116	10.5	3.36	-3	-17.9	.128	-5	.17	-95
9.0	.57	90	9.4	2.96	-23	-17.2	.138	-19	.05	-143
10.0	.63	70	8.9	2.77	-41	-17.4	.135	-28	.06	128
11.0	.69	51	7.9	2.47	-63	-17.7	.131	-39	.17	100
12.0	.77	33	7.1	2.26	-82	-18.0	.126	-52	.26	75
13.0	.82	21	6.0	2.00	-101	-18.6	.118	-65	.35	62
14.0	.85	13	5.4	1.86	-117	-19.2	.110	-75	.39	54
15.0	.83	1	4.8	1.73	-134	-19.7	.104	-83	.41	49
16.0	.81	-17	4.4	1.65	-154	-19.8	.102	-103	.42	41

A model for this device is available in the DEVICE MODELS section.

36 micro-X Package Dimensions

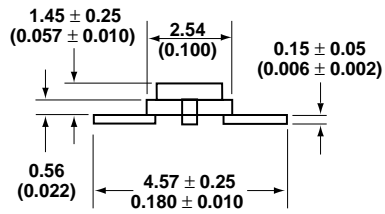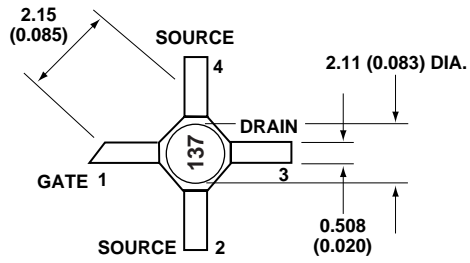

Notes:

1. Dimensions are in millimeters (inches)
2. Tolerances: in .xxx = ± 0.005
mm .xx = ± 0.13

射频和天线设计培训课程推荐

易迪拓培训(www.edatop.com)由数名来自于研发第一线的资深工程师发起成立,致力并专注于微波、射频、天线设计研发人才的培养;我们于 2006 年整合合并微波 EDA 网(www.mweda.com),现已发展成为国内最大的微波射频和天线设计人才培养基地,成功推出多套微波射频以及天线设计经典培训课程和 ADS、HFSS 等专业软件使用培训课程,广受客户好评;并先后与人民邮电出版社、电子工业出版社合作出版了多本专业图书,帮助数万名工程师提升了专业技术能力。客户遍布中兴通讯、研通高频、埃威航电、国人通信等多家国内知名公司,以及台湾工业技术研究院、永业科技、全一电子等多家台湾地区企业。

易迪拓培训课程列表: <http://www.edatop.com/peixun/rfe/129.html>



射频工程师养成培训课程套装

该套装精选了射频专业基础培训课程、射频仿真设计培训课程和射频电路测量培训课程三个类别共 30 门视频培训课程和 3 本图书教材;旨在引领学员全面学习一个射频工程师需要熟悉、理解和掌握的专业知识和研发设计能力。通过套装的学习,能够让学员完全达到和胜任一个合格的射频工程师的要求...

课程网址: <http://www.edatop.com/peixun/rfe/110.html>

ADS 学习培训课程套装

该套装是迄今国内最全面、最权威的 ADS 培训教程,共包含 10 门 ADS 学习培训课程。课程是由具有多年 ADS 使用经验的微波射频与通信系统设计领域资深专家讲解,并多结合设计实例,由浅入深、详细而又全面地讲解了 ADS 在微波射频电路设计、通信系统设计和电磁仿真设计方面的内容。能让您在最短的时间内学会使用 ADS,迅速提升个人技术能力,把 ADS 真正应用到实际研发工作中去,成为 ADS 设计专家...



课程网址: <http://www.edatop.com/peixun/ads/13.html>



HFSS 学习培训课程套装

该套课程套装包含了本站全部 HFSS 培训课程,是迄今国内最全面、最专业的 HFSS 培训教程套装,可以帮助您从零开始,全面深入学习 HFSS 的各项功能和在多个方面的工程应用。购买套装,更可超值赠送 3 个月免费学习答疑,随时解答您学习过程中遇到的棘手问题,让您的 HFSS 学习更加轻松顺畅...

课程网址: <http://www.edatop.com/peixun/hfss/11.html>

CST 学习培训课程套装

该培训套装由易迪拓培训联合微波 EDA 网共同推出,是最全面、系统、专业的 CST 微波工作室培训课程套装,所有课程都由经验丰富的专家授课,视频教学,可以帮助您从零开始,全面系统地学习 CST 微波工作的各项功能及其在微波射频、天线设计等领域的设计应用。且购买该套装,还可超值赠送 3 个月免费学习答疑...

课程网址: <http://www.edatop.com/peixun/cst/24.html>



HFSS 天线设计培训课程套装

套装包含 6 门视频课程和 1 本图书,课程从基础讲起,内容由浅入深,理论介绍和实际操作讲解相结合,全面系统的讲解了 HFSS 天线设计的全过程。是国内最全面、最专业的 HFSS 天线设计课程,可以帮助您快速学习掌握如何使用 HFSS 设计天线,让天线设计不再难...

课程网址: <http://www.edatop.com/peixun/hfss/122.html>

13.56MHz NFC/RFID 线圈天线设计培训课程套装

套装包含 4 门视频培训课程,培训将 13.56MHz 线圈天线设计原理和仿真设计实践相结合,全面系统地讲解了 13.56MHz 线圈天线的工作原理、设计方法、设计考量以及使用 HFSS 和 CST 仿真分析线圈天线的具体操作,同时还介绍了 13.56MHz 线圈天线匹配电路的设计和调试。通过该套课程的学习,可以帮助您快速学习掌握 13.56MHz 线圈天线及其匹配电路的原理、设计和调试...

详情浏览: <http://www.edatop.com/peixun/antenna/116.html>



我们的课程优势:

- ※ 成立于 2004 年,10 多年丰富的行业经验,
- ※ 一直致力并专注于微波射频和天线设计工程师的培养,更了解该行业对人才的要求
- ※ 经验丰富的一线资深工程师讲授,结合实际工程案例,直观、实用、易学

联系我们:

- ※ 易迪拓培训官网: <http://www.edatop.com>
- ※ 微波 EDA 网: <http://www.mweda.com>
- ※ 官方淘宝店: <http://shop36920890.taobao.com>